



ICN080

HARDMOUNT WASHER-EXTRACTOR

FOR VENDED LAUNDRY APPLICATIONS

INDUSTRIAL
BY DESIGN



Dependable

- Frame made of welded steel plate to increase life
- Large door allows easy loading and unloading
- Improved door lock and ergonomic door handle are designed for industrial use
- Wash cylinder made of stainless steel
 - Cylinder ribs provide perfect distribution of linens
- Pulleys and oversized bearing house made of cast iron
- 10-year extended warranty on the frame, cylinder, shaft, bearings and seals
3-year warranty on entire machine

Efficient

- 4-compartment soap dispenser: two for powder and two for liquid soap
 - Lid with clear symbols for perfect dosage
- Drain mounted directly under the tub to reduce water consumption
- Minimal distance between tub and drum decreases water usage
- Slow drain and leak detection conserves water and reduces preventative maintenance
- Infrared communications port allows for programming and monitoring of your laundromat's equipment from a PC or laptop

Intuitive

- Maestro V
 - Time-of-day pricing allows operator to choose between two price points and select hour blocks when each is in effect
 - 6 optimized wash cycles with the option of user-selectable modifiers for prewash and extra rinse
 - One-touch allows for easy operation: simply choose a program, then press start
 - Serial card interface - compatible with third-party card reader systems

IntelliSpin[®]

INNOVATIVE
TECHNOLOGY FOR
MAXIMUM PRODUCTIVITY

IntelliSpin is a technology that utilizes up to 200 G-Force to extract more water from the clothes and reduce bottlenecks at the dryer. This results in matched cycle times between the washer and dryer to optimize turns, saving customers time while increasing traffic flow and reducing your utility costs.


ICN080

Technical specifications

| | |
|------------------------------------|--------------------|
| Cylinder capacity (lb) | 80.0 |
| Cylinder volume (cu ft) | 12.9 |
| Cylinder diameter (inch) | 36 |
| Cylinder depth (inch) | 21.86 |
| Perforations diameter (inch) | 0.188 |
| Door opening diameter (inch) | 18.5 |
| Height under door (inch) | 17.91 |
| Height to doorhandle (inch) | 30.9 |
| Door swing (°) | 125 |
| Normal spin speed cylinder (rpm) | 443 |
| Fast spin speed cylinder (rpm) | 626 |
| Wash speed cylinder (rpm) | 39 |
| G-Force normal spin | 100 |
| G-Force fast spin | 200 |
| Dynamic bottom load (Lb/kN) | 1680/7.48 |
| Noise (dBA) (wash/spin) | 58/76 |
| Power motor (hp) | 5.0 |
| Water pressure (psi) | 20-85 |
| Hot water temp (°F) COIN | 125 |
| Water supply (inch) | 4 x 3/4" |
| Diameter drain (inch) | 3 |
| Drain flow capacity (gallons/min) | 55 |
| Steam pressure (psi) | 30-80 |
| Steam connection | 1 x 1/2" |
| Net unit weight (lb) | 1210 |
| Net unit dimensions (HxWxD) (inch) | 56.2 x 41.5 x 48.6 |
| Std Pkg weight (lb) | 1260 |
| Std Pkg Ship Dim. (HxWxD) (inch) | 58.6 x 44.0 x 54.5 |

Voltages

| | |
|-----------------------------------------------|--------|
| Boiler Fed /Steam N:440-480/50/60/3 | 15A |
| Boiler Fed /Steam X:200-208/220-240/50/60/1/3 | 20/15A |

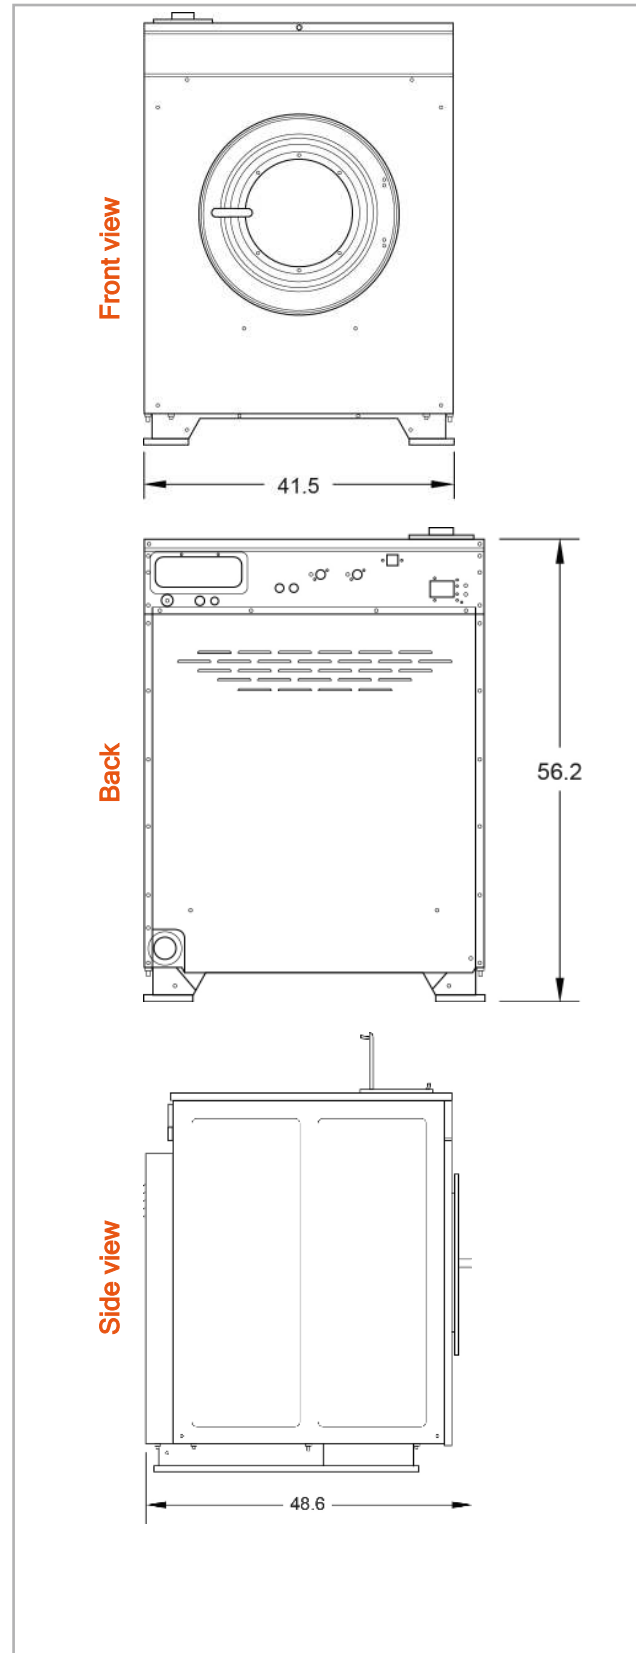

All specifications subject to change without notice



ICN100

HARDMOUNT WASHER-EXTRACTOR

FOR VENDED LAUNDRY APPLICATIONS

INDUSTRIAL
BY DESIGN



Dependable

- Frame made of welded steel plate to increase life
- Large door allows easy loading and unloading
- Improved door lock and ergonomic door handle are designed for industrial use
- Wash cylinder made of stainless steel
 - Cylinder ribs provide perfect distribution of linens
- Pulleys and oversized bearing house made of cast iron
- 10-year extended warranty on the frame, cylinder, shaft, bearings and seals
3-year warranty on entire machine

Efficient

- 4-compartment soap dispenser: two for powder and two for liquid soap
 - Lid with clear symbols for perfect dosage
- Drain mounted directly under the tub to reduce water consumption
- Minimal distance between tub and drum decreases water usage
- Slow drain and leak detection conserves water and reduces preventative maintenance
- Infrared communications port allows for programming and monitoring of your laundromat's equipment from a PC or laptop

Intuitive

- Maestro V
 - Time-of-day pricing allows operator to choose between two price points and select hour blocks when each is in effect
 - 6 optimized wash cycles with the option of user-selectable modifiers for prewash and extra rinse
 - One-touch allows for easy operation: simply choose a program, then press start
 - Serial card interface - compatible with third-party card reader systems


ICN100

Technical specifications

| | |
|------------------------------------|--------------------|
| Cylinder capacity (lb) | 100.0 |
| Cylinder volume (cu ft) | 15.2 |
| Cylinder diameter (inch) | 36.0 |
| Cylinder depth (inch) | 25.86 |
| Perforations diameter (inch) | 0.188 |
| Door opening diameter (inch) | 18.5 |
| Height under door (inch) | 17.91 |
| Height to doorhandle (inch) | 30.9 |
| Door swing (°) | 125 |
| Normal spin speed cylinder (rpm) | 443 |
| Fast spin speed cylinder (rpm) | 568 |
| Wash speed cylinder (rpm) | 39 |
| G-Force normal spin | 100 |
| G-Force fast spin | 165 |
| Dynamic bottom load (Lb/kN) | 1680/7.48 |
| Noise (dBA) (wash/spin) | 58/76 |
| Power motor (hp) | 5.0 |
| Water pressure (psi) | 20-85 |
| Hot water temp (°F) COIN | 125 |
| Water supply (inch) | 4 x 3/4" |
| Diameter drain (inch) | 3 |
| Drain flow capacity (gallons/min) | 55 |
| Steam pressure (psi) | 30-80 |
| Steam connection | 1 x 1/2" |
| Net unit weight (lb) | 1260 |
| Net unit dimensions (HxWxD) (inch) | 56.2 x 41.5 x 52.6 |
| Std Pkg weight (lb) | 1310 |
| Std Pkg Ship Dim. (HxWxD) (inch) | 58.6 x 44.0 x 58.5 |

Voltages

| | |
|-----------------------------------------------|--------|
| Boiler Fed /Steam N:440-480/50/60/3 | 15A |
| Boiler Fed /Steam X:200-208/220-240/50/60/1/3 | 20/15A |

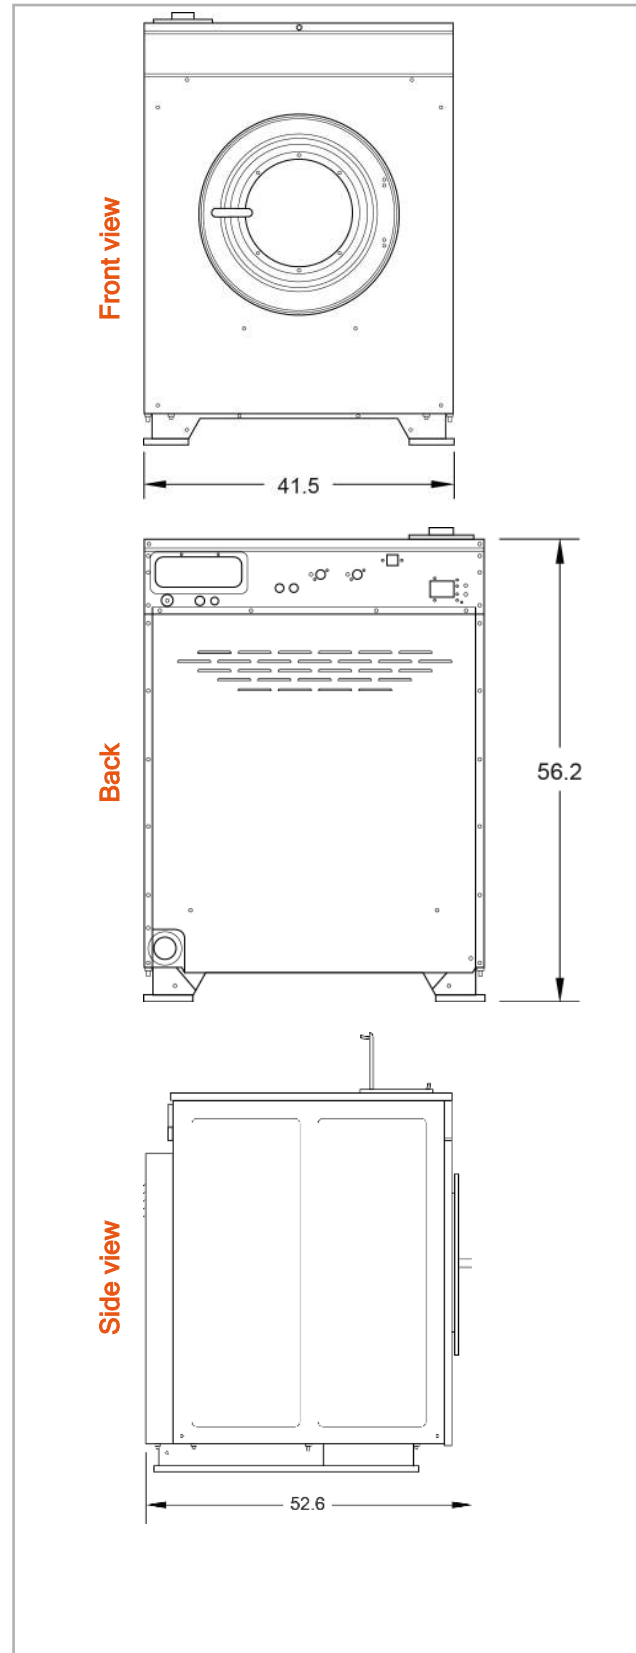

All specifications subject to change without notice