

# MLE/MLG26PD

MAYTAG® COMMERCIAL SINGLE-LOAD  
SUPER-CAPACITY STACK DRYER



## LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half-century.

## TWO POCKETS IN THE SPACE OF ONE

You can potentially double your dryer income and help eliminate waiting with two dryer pockets in the same floor space as one single-load dryer.

## FOR YOUR CUSTOMERS:

- Extra-Large 7.4 cu. ft. Capacity
- Easy-To-Use One-Touch Selection
- Time Remaining Display
- Optional Top-Off

## FOR YOUR OPERATION:

- Advanced Computer Trac® Controls Allow For Easy Programming
- Front Access For Easier Self Service
- Accu Trac® Audit System With Two-Way Data Communication
- Large-Capacity Metal Mesh Lint Filter
- Debit Card Compatibility
- Dual Coin-Drop Option

## BUILT-TO-LAST™ FEATURES:

- Four Roller Suspension With Permanently Lubricated Bearings
- Blower Guard Reduces Service Calls
- Premium Security Vault
- 5-Year Limited Warranty—All Parts Covered



Visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com) or call 800-662-3587




**MLE/MLG26PD**  
**MAYTAG® COMMERCIAL**  
**SINGLE-LOAD SUPER-CAPACITY**  
**STACK DRYER**

**MAYTAG® COMMERCIAL SINGLE-LOAD**  
**SUPER-CAPACITY STACK DRYER**  
**MICROPROCESSOR COIN-DROP**

DRYER SPECIFICATIONS	
<b>MODEL</b>	<b>MLE/MLG26PD</b>
<b>MOTOR</b>	
Single-phase, thermoprotected against overload, auto-reset	▪
HP (kw)	1/3 (.33)
<b>CAPACITY</b>	
Cu. ft. (liters)	7.4 (209.5)
<b>TUMBLE SPEED</b>	
RPM	50 ± 1.5
<b>ELECTRICAL REQUIREMENTS</b>	
MLE model—voltage	240V/60Hz*
MLG model—voltage	120V/60Hz
<b>BREAKER/FUSE REQUIREMENTS—amps</b>	
Electric model—domestic (each drying chamber)	30
Electric model—Canada (one terminal block per stack)	60
Gas models, all versions—(one power cord per stack)	15
<b>HEATER ELEMENT RATING—watts</b>	
Per pocket	5,600
<b>EXHAUST DUCT DIAMETER</b>	
In. (mm)	4 (101.6)
<b>ELECTRONIC BURNER IGNITION</b>	
MLG models	▪
<b>GAS RATING</b>	
MLG models—BTU/hr. (kcal/hr.)	22,000 (5,544)
<b>GAS INLET</b>	
MLG models—in.	3/8 N.P.T.
<b>AUTOMATIC PRESSURE REGULATOR</b>	
MLG models	▪
<b>ADJUSTABLE LEVELING LEGS</b>	
MLG models	▪
<b>APPROXIMATE WEIGHT</b>	
Crated—lbs. (kg)	294 (133.4)
Uncrated—lbs. (kg)	272 (123.4)
<b>DIMENSIONS</b>	
Width—in. (mm)	27 (686)
Depth—in. (mm)	29 (737)
Height—in. (mm)	76.75 (1,950)

See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.  
 \*208-Volt electrical element kit available. Optional window door kit #W10791532.

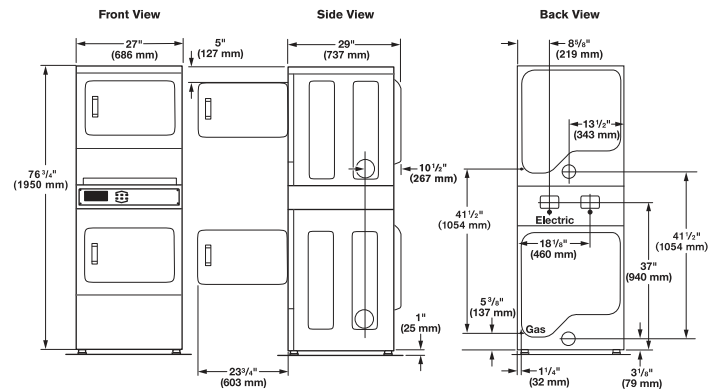

**MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS**

Number Of 90° Turns	Rigid Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	64 ft. (19.5 m)	58 ft. (17.7 m)
1	54 ft. (16.5 m)	48 ft. (14.6 m)
2	44 ft. (13.4 m)	38 ft. (11.6 m)
3	35 ft. (10.7 m)	29 ft. (8.8 m)
4	27 ft. (8.2 m)	21 ft. (6.4 m)



**5-YEAR LIMITED WARRANTY**  
**ALL PARTS COVERED**

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.

**OUR COMMITMENT TO DEPENDABLE QUALITY**

At Maytag brand, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.