


ADC EWS 100G OPL Washer

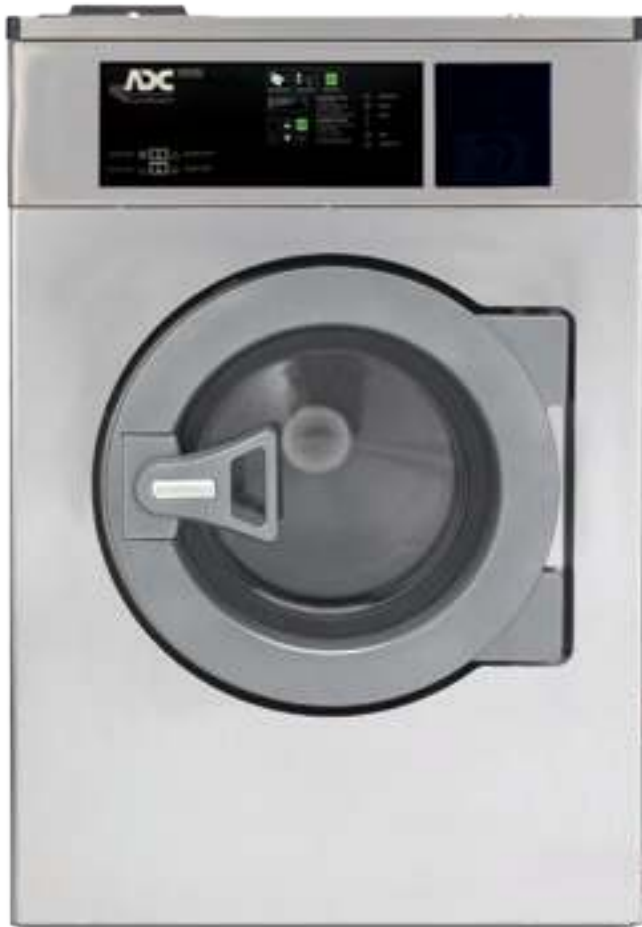

Shown with M Controller

Features

- Rigid-Mount/100 G-Force
- M Controller with 10 Cycle Options
- Inverter-Driven Motor
- Robust A-Frame Design For Excellent Strength and Stability
- Intuitive Micro Controls (IMC)
- Load Unbalance Detection
- Full Stainless-Steel Cabinet
- 7 External Chemical Injection Ports: M Controller/4 Signals
- Flexible Water Level Settings
- Easy-to-Use, 4 Compartment Dispenser Allows for Convenient Manual Loading of Detergent, Bleach and Fabric Softener
- Ergonomic, Easy-Grip Handle
- 5/3-Year Limited Warranty

EcoWash 100G Rigid-Mount Washers

Standard-Spin Model Numbers

EWS-25
EWS-30
EWS-40
EWS-60
EWS-80



Rigid-Mount

EcoWash standard-spin washer/extractors (100Gs) feature a heavy-duty A-frame base constructed from structural channel iron for excellent strength and stability.

Durable Door Lock and Handle

The durable, ergonomic design of the door handle combined with our Easy Lock door lock provides optimal convenience.

5/3-Year Limited Warranty

ADC's EcoWash machines carry a 5/3-year limited warranty.

Intuitive Micro Controls (IMC)

Programmable microprocessor controls that are customizable and easy-to-use.



M Controller (Standard)

- 10 cycle options
- Selectable water levels
- Selectable wash temperatures
- Modify cycle times in wash, rinse and spin phase
- Rapid cycle advance
- Simple diagnostic control

	EWS-25 (100 G-FORCE)	EWS-30 (100 G-FORCE)	EWS-40 (100 G-FORCE)	EWS-60 (100 G-FORCE)	EWS-80 (100 G-FORCE)
DRUM					
Load Capacity (lb/kg)	25 / 11.34	30 / 13.60	40 / 18.14	60 / 27.21	80 / 36.28
Drum Volume (cu. ft./liter)	3.53 / 100	4.59 / 130	6.35 / 180	8.82 / 250	12.36 / 350
Drum Diameter (in/mm)	24.41 / 620	24.41 / 620	27.56 / 700	30.31 / 770	33.86 / 860
Drum Depth (in/mm)	12.99 / 330	16.93 / 430	18.50 / 470	20.86 / 530	23.62 / 600
DIMENSIONS					
Width (in/mm)	28.31 / 719	28.31 / 719	31.02 / 788	34.84 / 885	38.54 / 979
Depth (in/mm)*	26.25 / 667	31.87 / 809	32.62 / 829	38.00 / 965	42.00 / 1067
Height (in/mm)	46.34 / 1177	45.37 / 1152	51.50 / 1301	52.00 / 1321	55.37 / 1406
Weight (lb/kg)	478 / 217	526 / 239	619 / 281	749 / 340	1042 / 473
DIMENSIONS WITH PACKAGING					
Crated Width (in/mm)	28.31 / 719	29.93 / 760	32.68 / 830	36.61 / 929	40.16 / 1020
Crated Depth (in/mm)	29.06 / 738	39.77 / 1010	39.78 / 1010	45.67 / 1160	48.82 / 1240
Crated Height (in/mm)	55.51 / 1409	55.52 / 1410	61.42 / 1560	61.43 / 1560	66.14 / 1679
Crated Weight (lb/kg)	496 / 225	544 / 247	663 / 301	815 / 370	1109 / 503
DOOR					
Height to Bottom of Door	22.36 / 568	22.36 / 568	25.75 / 654	25.75 / 654	28.86 / 733
Door Opening Diameter (in/mm)	14.70 / 373	14.70 / 373	14.71 / 373	14.70 / 373	22.05 / 560
POWER					
Voltage/Phase (50hz or 60hz)	208-240 / 1, 3PH	208-240 / 1, 3PH	208-240 / 1, 3PH	208-240 / 1, 3PH	208-240 / 1, 3PH
Full Load Current / Breaker (amps)—1PH	5.26 / 15	6.35 / 15	11.56 / 15	13.00 / 20	13.00 / 20
Full Load Current / Breaker (amps)—3PH	3.88 / 15	4.51 / 15	7.53 / 15	9.54 / 15	9.50 / 15
CONNECTIONS					
Water Inlet (GHT/BSP)	¾" / ¾"	¾" / ¾"	¾" / ¾"	¾" / ¾"	¾" / ¾"
Steam Inlet (BSP)	½"	½"	½"	¾"	¾"
Drain (in/mm)	3 / 76	3 / 76	3 / 76	3 / 76	3 / 76
CYLINDER SPEED					
Washing Speed (rpm)	53	53	50	48	45
Spinning Speed (rpm)	538	538	507	483	458
G-Force	100	100	100	100	100
WATER					
Average Usage (gallons)**	18.30	29.03	36.82	42.58	59.86

*Depth measured from the front panel to the furthest extent of the back guard.

**One wash, two rinse cycles.

Three-Year Limited Warranty on Parts.

For the first three (3) years from the date of purchase, when this commercial appliance is installed, maintained and operated according to the instructions attached to or furnished with the product, American Dryer brand of Whirlpool Corporation (hereafter "ADC") will pay for factory-specified parts or original equipment manufacturer parts to correct defects in materials or workmanship.

Fourth- and Fifth-Year Limited Warranty on Certain Parts.

In the fourth and fifth years from the date of purchase, ADC will pay for the following washer parts: the outer shell, drum and shaft assembly, inner welded frame, and bearings and seals.