

COMMERCIAL DRYERS



Featuring Factory-Installed Coin Slide and Coin Box



FOR YOUR CUSTOMERS

- Large Capacity is Ideal for Family-Size Loads
- Increased Capacity Allows Large Loads to Tumble and Spread, Reducing Dry Time
- 3 Cycle Options: Regular/Heavy, Permanent Press and Knits/Delicates
- Easy-to-Follow Console Instructions
- 180° Wide-Opening Side-Swing Door Allows For Convenient Access

IMPROVED AIRFLOW SYSTEM

- New Blower Housing Wave Insert Increases Air Velocity up to 10%
- Increases Efficiency, Heating Element Lifespan and Improves Fabric Care†



† Results per Whirlpool® dryer testing conducted 07/03 – 08/04.

CEM2940TQ—29" Electric Dryer CGM2941TQ—29" Gas Dryer

- 7.0 Cu. Ft. Drum Capacity
- Push-Button Controls with Stainless-Look Console
- 3 Cycles: Regular/Heavy (High Heat), Permanent Press (Medium Heat), and Knits/Delicates (Low Heat)
- 3 Timing Cycles Possible with Included Cams*
- Large Removable, Door-Mounted Lint Screen
- 180° Wide-Opening Reversible Side-Swing Door
- Powdered Paint Top, Door and Cabinet
- Electric Model Features Element Rated at 5600 Watts, 240-Volt
- Gas Model Features a 22K BTU Burner
- Motor: 1/3-HP with Built-In Overload Protector; Centrifugal Switch Turns Off Heating Element When Motor Stops
- Eight Quarter Coin Slide Capacity, Set Your Dry Price from \$0 to \$2 Per Cycle (\$1 Factory Preset)
- Power Cord Sold Separately (Electric Model Only)
- **90-Day Labor Only/2-Year Limited Parts Only Warranty****

*45-Minute Timing Cam Installed, 30 and 60 Minute Cams Included.

**Call 1-800-NO-BELTS for warranty details.

SINGLE OPERATING THERMOSTAT

For simple accurate temperature control.

LARGE CAPACITY METERCASE

Larger coin box for reduced collections.

COMMERCIAL DRYERS




Featuring Factory-Installed Coin Slide and Coin Box

Whirlpool® Commercial Dryers Factory-Installed Coin Slide and Coin Box

DRYER SPECIFICATIONS		
MODELS	CEM2940TQ [†]	CGM2941TQ ^{††}
GENERAL INFORMATION		
Stainless steel look push-button console, white enamel drum, powdered paint finish cabinet and top, removable lint filter, improved metercase.	Metercase Model Factory-Installed Coin Slide and Coin Box, \$0-\$2 per Cycle, \$1 Factory Preset	Metercase Model Factory-Installed Coin Slide and Coin Box, \$0-\$2 per Cycle, \$1 Factory Preset
DRUM VOLUME	7.0 Cu. Ft.	7.0 Cu. Ft.
MOTOR	1/3-HP Single-Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating	1/3-HP Single-Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating
ELECTRICAL REQUIREMENTS	3-Wire Nominal 240/208 Volt, 60 Hz, A.C. Standard 30 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)	Nominal 120 Volt, 60 Hz, A.C. Standard 15 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)
HEATER TYPE	Electric	Gas*
HEATER/BURNER RATING (Add 500 Watts Approx. for Motor on all Dryer Models)	Heater Rated at 5600 Watts	22,000 BTU Natural Gas
OPERATIONAL AMPERAGE (Does Not Include Control or Gas Valve)	Motor – 4.0 Amps No Load Heater 23.33 Amps @ 240 Volt, 27.33 Total	Motor – 4.0 Amps No Load
SHIPPING WEIGHT (EST.)	147 Lbs.	147 Lbs.
DIMENSIONS		
Width – in. (cm)	29 (73.7 cm)	29 (73.7 cm)
Depth – in. (cm)	27.75 (70.5 cm)	27.75 (70.5 cm)
Height – in. (cm)	42.875** (108.9 cm)	42.875** (108.9 cm)
*Burner orifices are available for manufactured, natural, mixed and LP gas with varying BTU ratings. ** (height at metercase top) †Power cords on electric models sold separately. ††LP Conversion Kit: 49572. Energy information is available online at www.whirlpoolcommerciallaundry.com/products		




Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

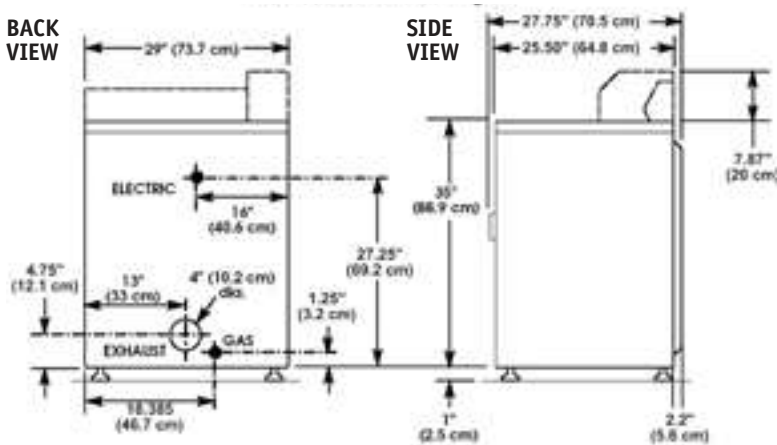

Exhaust Information

All dryers require the equivalent of a 4-inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.



Maximum length of 4" diameter rigid metal duct		
0	64 Ft.	58 Ft.
1	54 Ft.	48 Ft.
2	44 Ft.	38 Ft.
3	35 Ft.	29 Ft.
4	27 Ft.	21 Ft.
Maximum length of 4" diameter flexible metal duct		
0	36 Ft.	28 Ft.
1	31 Ft.	23 Ft.
2	27 Ft.	19 Ft.
3	25 Ft.	17 Ft.
4	23 Ft.	15 Ft.



**EXCLUSIVE 90-DAY FACTORY
LABOR WARRANTY
DRYER WARRANTY—2-YEAR
LIMITED (PARTS ONLY)**

For important information regarding warranty inclusions, exclusions and limitations, please call 1-800-NO-BELTS.

To Locate a Distributor Near You, Please Visit www.whirlpoolcommerciallaundry.com/distributor, or call 1-800-NO-BELTS